


Dynamic Rubber standard valve fittings.

Standard materials: Brass or 303SS Additional setup required for other Materials
Dynamic Rubber can produce custom fittings if necessary at extra cost

Naming: **DRA-Thread- Overall Height**


Type A fittings available in Brass or 303 Stainless Steel

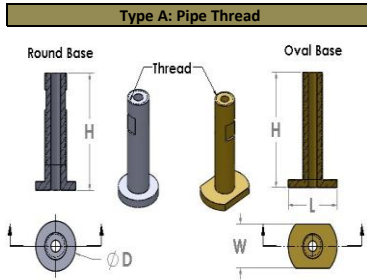

Part Number	Thread	Height (in) H	Base D (Round)(in)	Base L X W (Oval) (in)
NPT Thread				
DRA-1/8NPT-1.5	1/8" NPT	1.500	0.75	
DRA-1/16NPT-1.5	1/16"NPT	0.450	0.75	
United Thread Standard				
DRA-1/4-28-.67	1/4"-28	0.670	0.49	
DRA-10-32-1.0	#10-32	1.000	0.50	
DRA-1/4-20-3.0	1/4"-20	3.000	Base serves as female 1/8NPT thread adapter	
British Standard Pipe Thread				
DRA-1/8BSP-1.5	1/8" BSP	1.500	0.13	
SI (Metric) Threads				
DRA-M10X1.25-1.25	M10x1.25	1.250	0.63	
DRA-M8X1.25-1.97	M8 x 1.25	1.970		
DRA-M6X1.0-1.4	M6x1.0	1.400	0.50	
DRA-M3X.5-6g-.395	M3x.5-6g	0.395	0.20	

Naming: **DRB-Sub Type,tubing ID-Thread**


Type B fittings available in brass. Additional cost applies to other materials.

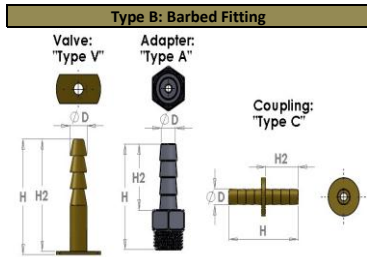

Part Number	Tubing (ID)	Barb OD (D)	Height of fitting (H)	Height of barb (H2)	Description of base	Sub Type
1/8"						
DRB-C1/8	1/8"	0.180	0.975	0.06	Coupling base: Φ .44x.06	Coupling
DRB-A1/8-Schraeder	1/8"	0.165	1.200	0.5	Schraeder Adapter/Insert	Adapter
DRB-A1/8-1/8NPT	1/8" or 3/16"	0.200	1.064	0.460	3/8" Male 1/8"NPT	Adapter
DRB-V3/16	3/16"	0.236	1.330	0.035	Oval .34x.63x.035	Valve
DRB-A3/16-1/8NPT	3/16"	0.236	1.240	0.760	.225" Male 1/8"NPT	Adapter
DRB-V1/4	1/4"	0.280	0.750	0.020	Φ 1.25 x .02 Round Base	Valve
DRB-A1/4-1/4NPT	1/4"	0.290	2.150	0.950	3/8" Male 1/4"NPT Swivel	Adapter
DRB-C1/4	1/4"	0.300	2.000	0.950	Coupling base: Φ .44x.10	Coupling
DRB-A1/4-1/4NPT	1/4"	0.300	0.780	0.720	Female #10-32 Thread	Adapter
DRB-A3/8-3/8NPT	3/8"	0.420	1.750	0.950	9/16" Male 3/8" NPT	Adapter


Naming: **DRO-O-ringID-Height**

Type O valves available in Stainless Steel 303 or Brass

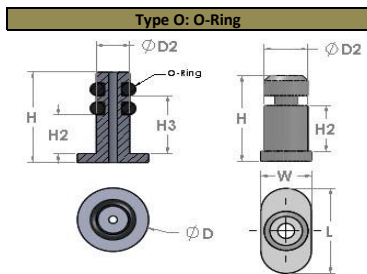

Part Number	O-ring ID	Height (in) H	Height O-Ring H2 (in)	Height O-Ring H3 (in)	Base D (Round) (in)	Base L x W (Oval) (in)	OD (in) D2
Large O-Ring							
DRO-7mm-1.35	0.280	1.350	1.040		0.500		0.385
DRO-8mm-1.77	0.340	1.770	0.970		0.750		0.47
4mm							
DRO-4mm-1.98	0.150	1.980	1.750		0.500		0.240
DRO-4MM-.67	0.160	0.670	0.440			0.67 x .350	0.31
3mm ~ 1/8" ID							
DRO-3mm-.59	0.118	0.590	0.372		0.236		0.185
DRO-3mm-.44	0.120	0.440	0.250		0.300		0.235
DRO-3mm-.787	0.118	0.787	0.614			.50 x .315	0.236
DRO-3mm-.71	0.120	0.710	0.375	0.525	0.500		0.240
DRO-3mm-1.0	0.120	1.000	0.820			0.66 x .350	0.230
2mm ID							
DRO-2mm-.325	0.080	0.325	0.235		0.200		0.120

Naming: **DRC-Insert type -Descriptor**

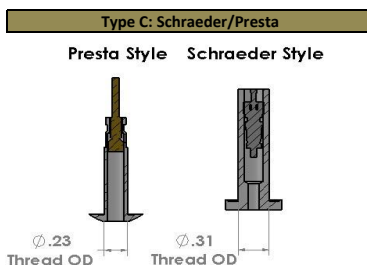

Former Part Number	Insert Type	Base	Material
DRC-Presta-BV	Presta	Round .54 Dia	Stainless Steel
DRC-Schraeder-BrassMCV	Schraeder	Male 1/8" NPT up to base	Brass
DRC-Schraeder-MCV	Schraeder	Round .54 Dia	Stainless Steel